


# Galvanised Ropes: 6x36 Fibre Core

**BS EN 12385**  
Finish: Galvanised  
  
1960N Tensile Grade



Normal Diameter (mm)	Approx Mass (kg/100m)	Min Breaking Load (tonnes)	Min Breaking Force (kN)
8	23.5	4.22	41.4
9	29.7	5.34	52.4
10	36.7	6.60	64.7
11	44.4	7.99	78.3
12	52.8	9.50	93.1
13	62.0	11.10	109.0
14	71.9	13.00	127.0
16	94.0	16.90	166.0
18	119.0	21.40	210.0
19	132.0	23.80	233.0
20	147.0	26.40	259.0
22	178.0	31.90	313.0
24	211.0	38.00	373.0
26	248.0	44.60	437.0
28	288.0	51.70	507.0
32	376.0	67.50	662.0
35	450.0	80.80	792.0
36	476.0	85.50	838.0
38	530.0	95.30	934.0
40	587.0	106.00	1040.0

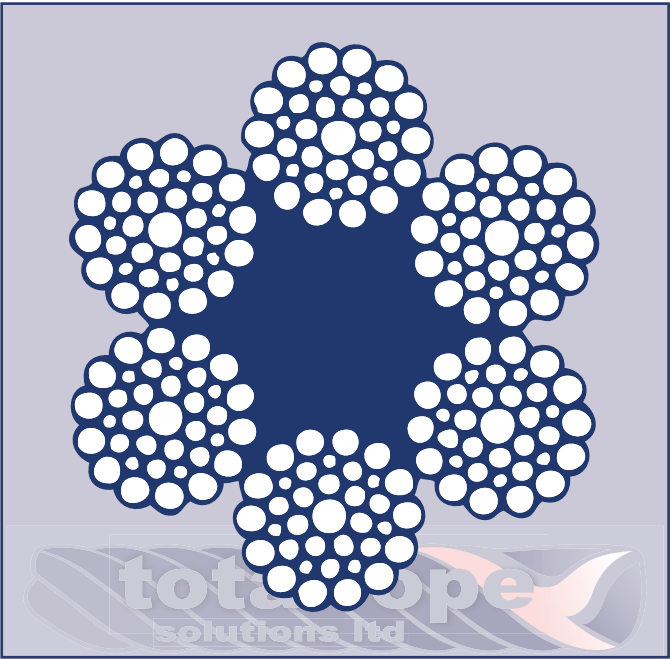